

valco  
baby

# T3 PLUS

## RECLINING STROLLER

### PRODUCT REFERENCE GUIDE

Thank you for purchasing a quality Valco Baby product. Please read and follow the instructions outlined in this guide carefully. Familiarise yourself with the construction and safety features; be sure that you understand all the warnings and safety guidelines before use.

**Important: Please read the following instructions carefully before assembling this product. Retain this guide in a safe place for future reference.**



Due to our policy of continuous product development, this product is constantly evolving. It is possible that some features or procedures outlined here have changed since this document was written. If you are unsure of any procedure shown here, please contact us via the web at **info@valco.com.au** to obtain the most up to date information before use. Include the batch number, which can be found on a sticker on the frame.

All pictures and diagrams herein are provided for illustration purposes only. Actual product, colour or fabric may vary. Valco Baby reserves the right to modify or alter any specification or colour without notice or obligation to modify any product previously purchased

#### FURTHER INFORMATION

In Australia/New Zealand

[www.veebee.com.au](http://www.veebee.com.au)

In North America only

[www.valcobaby.com](http://www.valcobaby.com)  
1800 610 7850



© Copyright VE 2009

# STROLLER ASSEMBLY/OPENING

FIGURE A - ASSEMBLING YOUR STROLLER

1. Remove the carton contents carefully. Dispose of any packaging materials thoughtfully.
2. Release the stroller from the locked position by lifting the locking handle from locking rivet on the stroller frame.  
HINT: You may have to squeeze the stroller legs and handles closer together first so as to release the tension on the rivet.
3. Standing behind the stroller and holding it by the handles, allow the wheels to fall forward.
4. With your foot, press down on the primary locking hinge until the entire frame locks into the open position.

FIGURE B - ATTACHING THE REAR WHEELS

5. Identify the rear wheels by the red brake levers.
6. With the red levers facing to the rear, align the rear wheel housing with the nylon housing on the rear frame leg.
7. Insert rear wheel housing onto the rear leg and push upward until you feel it lock into place.
8. Repeat for other leg.





**IMPORTANT WARNING: ALWAYS TEST THAT ALL LATCHES ARE SECURELY ENGAGED BEFORE USE.**

FIGURE C - ATTACHING THE FRONT WHEELS

9. Insert the front swivel wheel over the housing on the front leg. Repeat for the other wheel.
10. To fix the front wheels in the non swivel position, turn the wheel so that the two notches on both housings line up at the front.
11. Press the swivel lock down firmly until it locks into place. To unlock, lift the swivel lock with your foot lock to release.

FIGURE D - ATTACHING THE HOOD

12. Fasten the hood Velcro straps around the top of the frame (a). Clip the hood clip onto the frame just above the folding hinge (b) and snap the side down into place to secure.
13. Repeat for the other side.
14. Snap the back of the hood to the corresponding snaps found on the back of the seat.

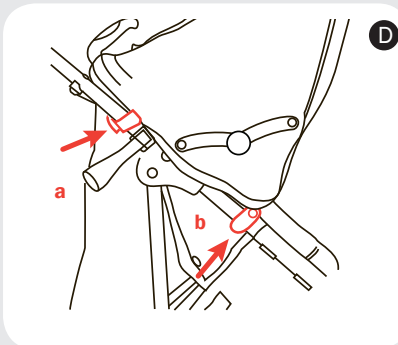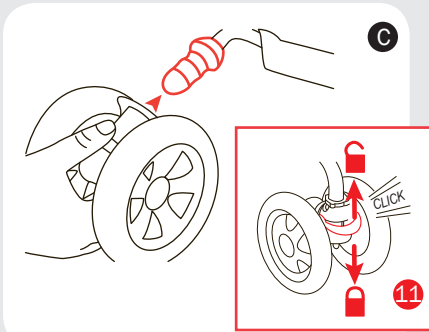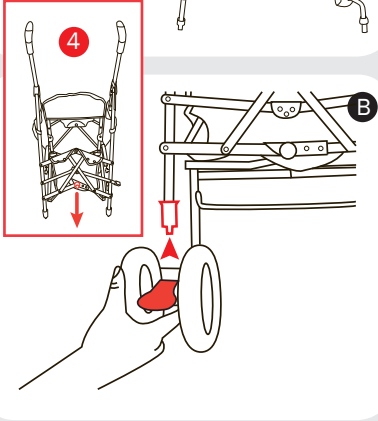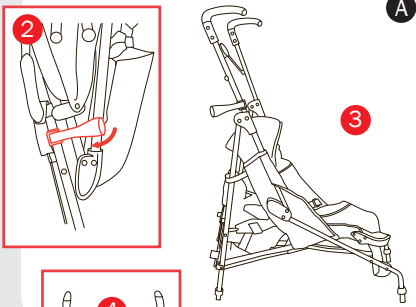

## FOLDING YOUR STROLLER

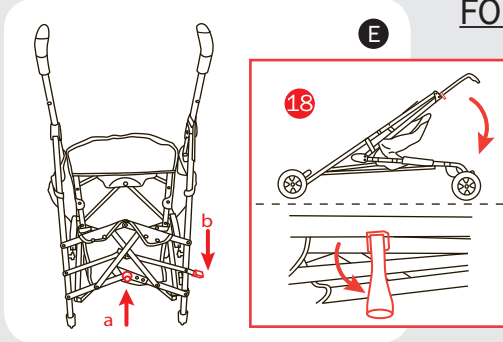


FIGURE E - FOLDING YOUR STROLLER

15. Lift the primary safety lock (a) with your foot.
16. Press down on the secondary lock (b) with your foot.
17. Simultaneously push the handles all the way down to meet the wheels.
18. Secure the frame closed with the locking handle.

FIGURE F - USING YOUR HARNESS

TO SECURE YOUR CHILD IN THE HARNESS:  
Your child MUST always be harnessed while in the Stroller.

TO OPEN YOUR HARNESS:

19. Push down on both Buckle Prongs.
20. Simultaneously press the release button in the centre of the buckle.
21. Lift the buckles from the Buckle Housing.

**This process may be difficult as your buckle system has been designed to meet very stringent safety standards to ensure that a child cannot release the harness unaided.**

TO SECURE YOUR CHILD IN THE HARNESS:

22. Overlap buckles and so that they fit together to form one complete buckle.
23. Insert the completed buckle into the Buckle Housing until it engages securely in place.

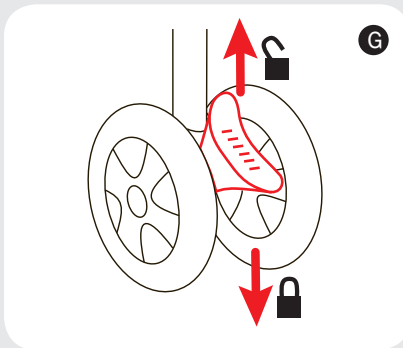
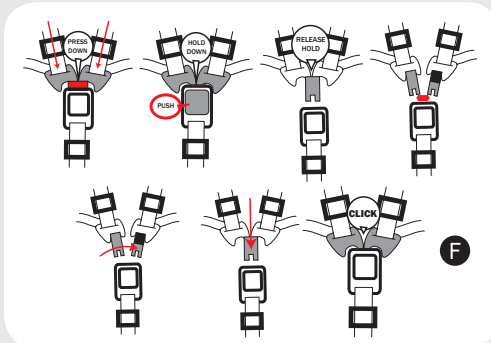


FIGURE G - USING YOUR BRAKES


24. To activate the brake press down on each brake lever until it engages in the brake cog on the wheel.
25. To release, lift each brake lever in turn.

**WARNING: ALWAYS ENGAGE BOTH WHEEL BRAKES WHEN THE STROLLER IS AT REST.**

FIGURE H - ADJUSTING YOUR SEAT AND FOOTREST

26. To raise the seat, gently push the seat forward with your thumbs into the desired position.
27. To recline the seat, simultaneously squeeze both red seat recline levers and ease the seat back to the desired position.

**ALWAYS TEST THAT THE SEAT IS SECURELY FIXED IN POSITION BEFORE USE.**

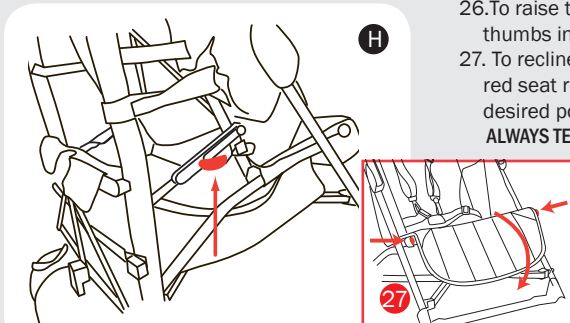

28. To adjust your footrest downward, simultaneously press the adjusting button and hold in while pressing down on the footrest.

**FOR SAFETY, YOUR FOOTREST IS DESIGNED TO COLLAPSE IF EXCESS WEIGHT IS APPLIED TO IT.**

## **WARNING**

- **FOLLOW THE MANUFACTURER'S INSTRUCTIONS.**
- **PUT ON ALL THE BRAKES WHENEVER YOU PARK THE PRAM/STROLLER.**
- **DO NOT LEAVE CHILDREN UNATTENDED.**
- **DO NOT CARRY EXTRA CHILDREN OR BAGS ON THIS PRAM/STROLLER.**
- **MAKE SURE CHILDREN ARE CLEAR OF ANY MOVING PARTS IF YOU ADJUST THE PRAM/STROLLER. OTHERWISE THEY MAY BE INJURED.**

Remember, your child's safety is your responsibility...

- NEVER USE ON STAIRS OR ESCALATORS.
- ALWAYS USE THE TETHER STRAP WHEN THE STROLLER IS IN USE.
- THE CORRECT USE AND MAINTENANCE OF THIS VEHICLE ARE ESSENTIAL.
- BE SURE THAT ALL CLAMPS AND BUCKLES ARE SECURELY FIXED AND IN PLACE BEFORE USE
- WHEN IN THE STROLLER, YOUR CHILD MUST ALWAYS WEAR THE SAFETY HARNESS, CORRECTLY FITTED AND ADJUSTED, AT ALL TIMES.
- THE MAXIMUM WEIGHT OF THE CHILD FOR WHICH THIS STROLLER WAS INTENDED IS 18 KGS.
- CAN BE USED FROM A NEWBORN BABY ONWARDS. A COCOON, SPECIALLY DESIGNED TO BE USED WITH A STROLLER, IS RECOMMENDED WHEN ANY FULLY RECLINING STROLLER IS USED WITH A NEWBORN.
- NEVER RUN WITH A NEWBORN BABY IN ANY PRAM OR STROLLER UNTIL THE CHILD CAN SIT UP UNASSISTED (APPROXIMATELY 6 MONTHS).
- CHECK ALL PARTS BEFORE USE FOR BREAKAGE OR FATIGUE. DISCONTINUE USE IMMEDIATELY IF ANY PART IS FOUND TO BE DAMAGED OR BROKEN.
- MAXIMUM LOAD OF BASKETS: 3.5KGS.
- DO NOT CARRY ADDITIONAL CHILDREN. THIS STROLLER IS MANUFACTURED FOR THE USE WITH ONE CHILD ONLY
- ALWAYS BE AWARE OF THE RISKS PROVIDED BY FIRE AND OTHER SIGNIFICANT SOURCES OF HEAT SUCH AS RADIATORS, ETC. WHICH MAY BE IN THE IMMEDIATE VICINITY OF YOUR STROLLER.
- IT MAY BE UNSAFE TO USE ANY ACCESSORIES OTHER THAN VALCO BABY APPROVED ONES.
- THIS PRODUCT IS INTENDED FOR DOMESTIC USE ONLY. IT IS NOT INTENDED FOR COMMERCIAL USE.

Should the chassis become wet, dry off promptly before storing. If this pram is used near the ocean or salted roads, spray the chassis and seat frame with water and dry. We recommend a rust inhibiting product should be used to prevent rust and fatigue on metal parts.

We recommend that you wipe down axles and lubricate the wheels every 3 months. Sand and dirt can grind down axles, if you live near the beach or in a dusty environment you must wipe down the axles and wheels then lubricate them monthly.

AXLES ARE BEST LUBRICATED WITH GREASE OR PETROLEUM JELLY. MOVING PARTS ARE BEST LUBRICATED WITH SILICONE BASED PRODUCTS. DO NOT USE OIL BASED PRODUCTS.

**valco**  
baby

**In Australia/New Zealand**

[www.veebee.com.au](http://www.veebee.com.au)

**In North America only**

[www.valcobaby.com](http://www.valcobaby.com)  
**1 800 610 7850**